H512X TENDER

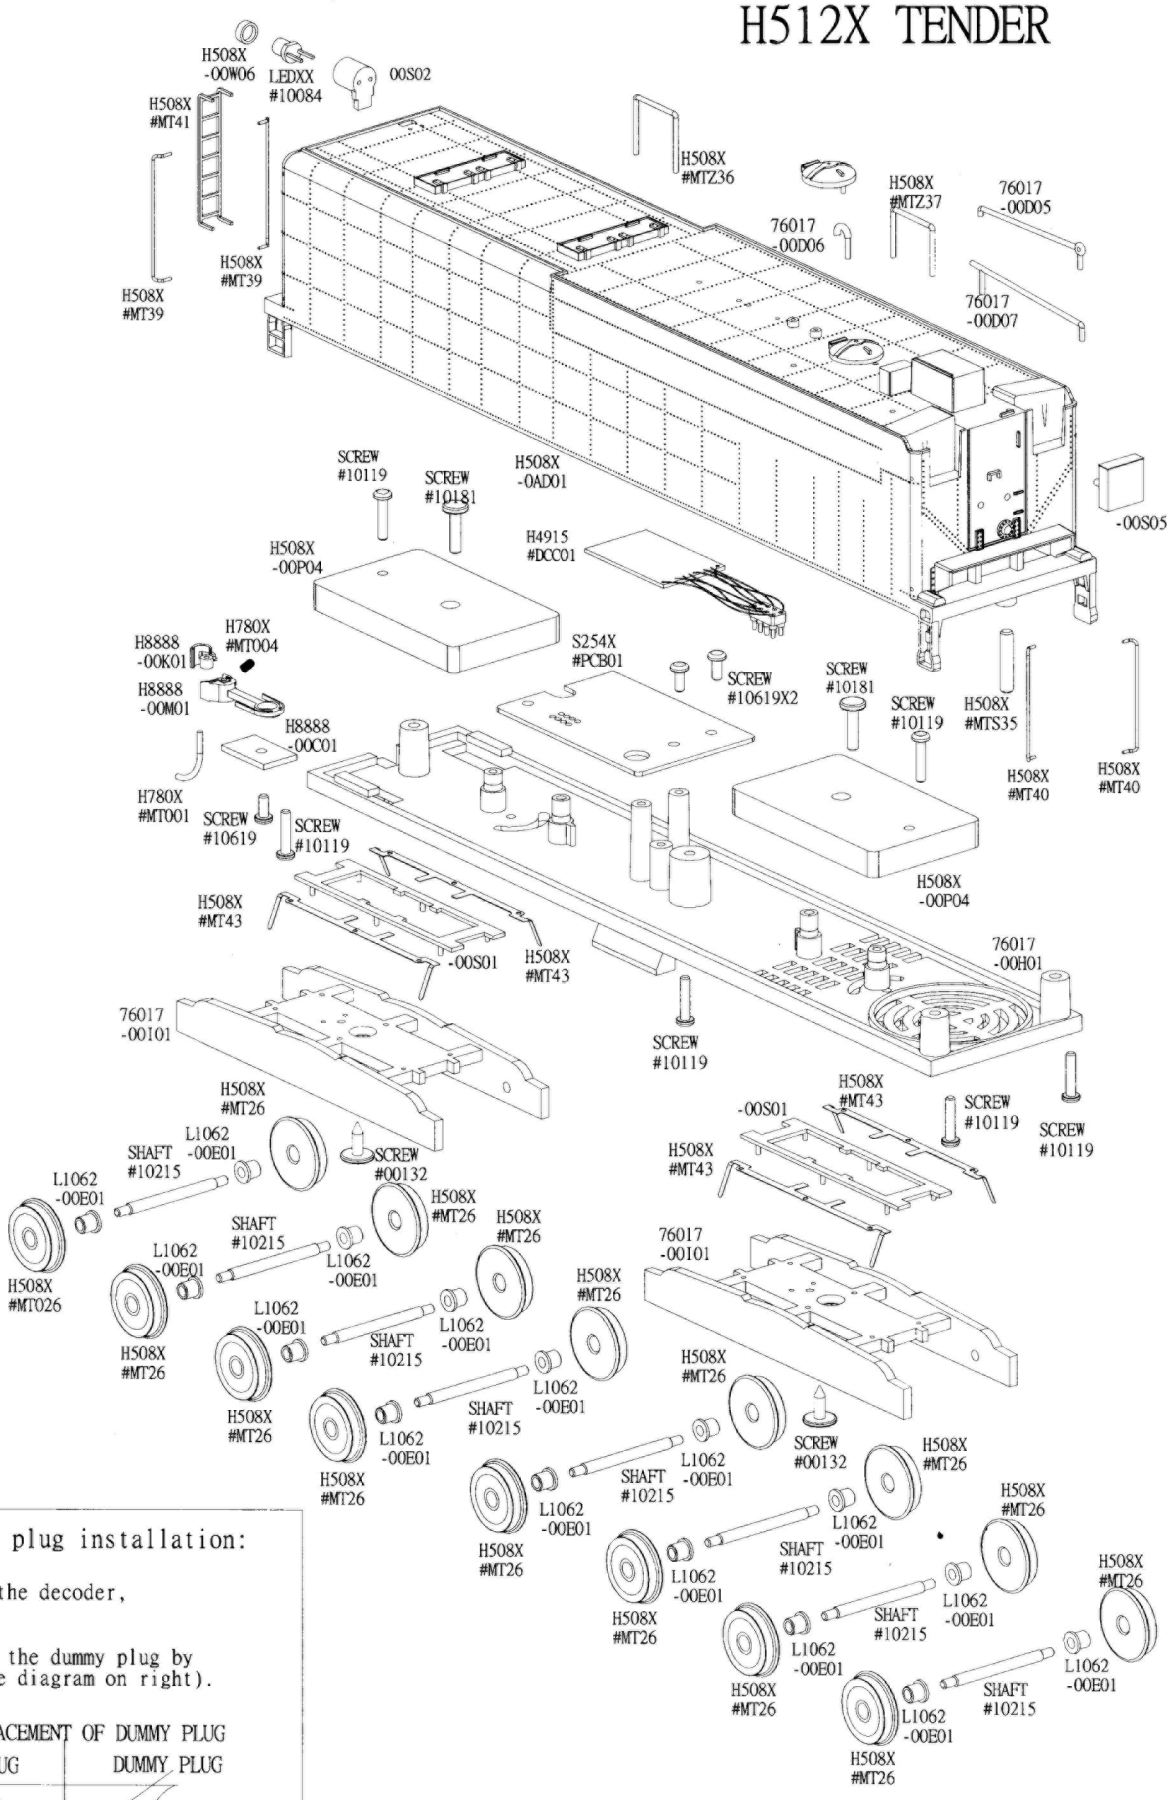

For dummy plug installation:

a)Remove the decoder,

b)install the dummy plug by tool(see diagram on right).

CORRECT PLACEMENT OF DUMMY PLUG