


TENDER ASSEMBLY



D) INSTALLATION OF SOUND MODULE (OPTIONAL)

1. Remove the screw which underneath tender chassis.
2. Gently remove the bodyshell.
3. Install the soundmodule on decoder board.
4. Assembly the tender body to tender chassis.

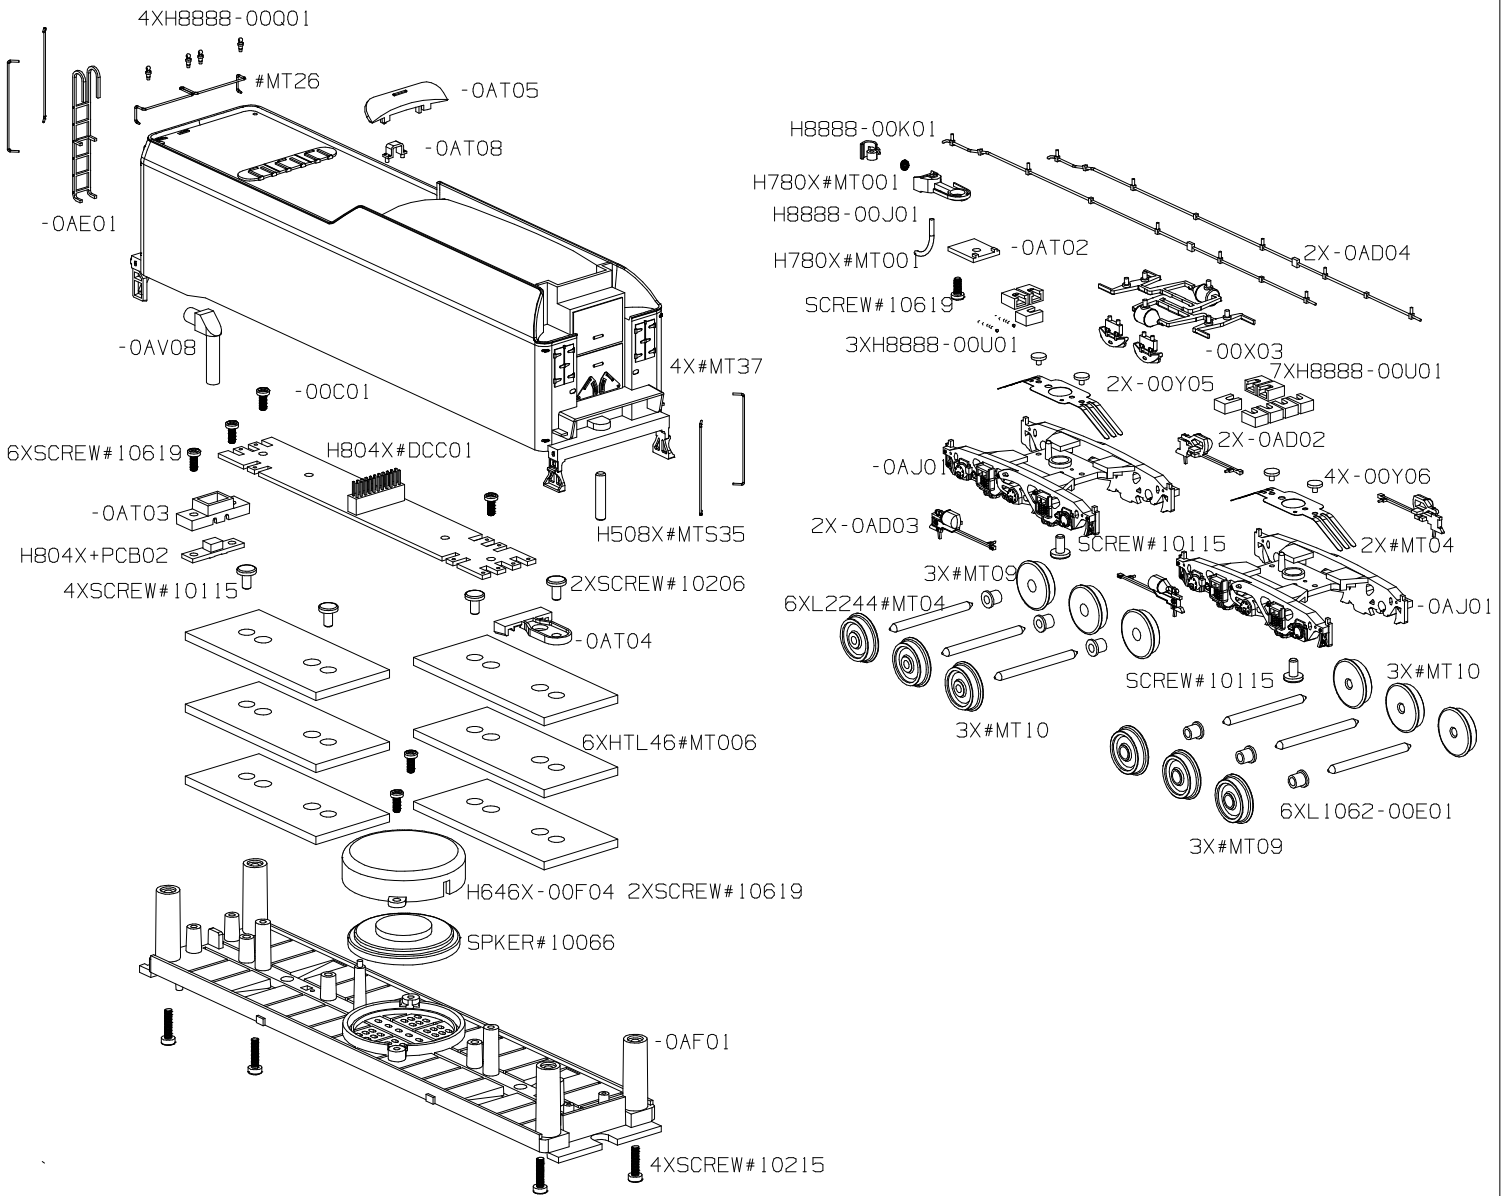